


GAMMA

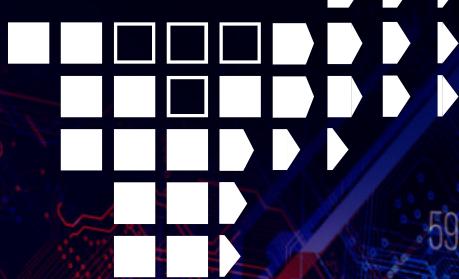

Autoryzowany dystrybutor w Polsce

AMPIRE

Specyfikacja wyświetlacza
AM-1280800Q1TZQW-00H

**Biuro handlowe
w Warszawie**

ul. Kacza 6 lok. A (wejście od ul. Wolności)
01-013 Warszawa, mazowieckie

Godziny pracy

Poniedziałek - Piątek
w godzinach: 9 - 17

Zapytania handlowe

info@gamma.pl
+48 22 862 75 00
+48 22 862 75 01 (fax)

**Biuro handlowe
w Zabrzu**

ul. Pawlicka 25
41-800 Zabrze, śląskie

Godziny pracy

Poniedziałek - Piątek
w godzinach: 8 - 17

Zapytania handlowe

info@gamma.pl
+48 32 278 41 58
+48 32 278 41 91
+48 32 272 81 25



晶采光電科技股份有限公司
AMPIRE CO., LTD.

SPECIFICATIONS FOR LCD MODULE

CUSTOMER	
CUSTOMER PART NO.	
AMPIRE PART NO.	AM-1280800Q1TZQW-00H
APPROVED BY	
DATE	

Approved For Specifications

Approved For Specifications & Sample

AMPIRE CO., LTD.
4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City
221, Taiwan (R.O.C.)
新北市汐止區新台五路一段 16 號 4 樓(東方科學園區A棟)
TEL:886-2-269672691 FAX:886-2-26967196 or 26967270

APPROVED BY	CHECKED BY	ORGANIZED BY

RECORD OF REVISION

Revision Date	Page	Contents	Editor
2017/6/7	--	New Release	Emil

1. GENERAL DESCRIPTION

The screen format is intended to support 1280(H) x 800(V)screen and 16.7M(RGB 8-bits)。

1.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Item	Specifications	unit
Screen Diagonal	12.1	inch
Display resolution(dot)	1280 (RGB) x 800	dots
Display area	261.1 (W) x 163.2 (H)	mm
Pixel pitch	0.204(W) x 0.204 (H)	mm
Color configuration	R.G.B Vertical stripe	
Overall dimension	278.0(W)x184.0(H)x9.5(D)	mm
Display Mode	Transmissive, Normally Black	
Brightness	1200	cd/m ²
Backlight unit	LED	
Display color	16.7M	colors
Electrical Treatment	1 channel LVDS	
Surface Treatment	Anti-glare	

Note 1: Viewing direction for best image quality is different from TFT definition; there is a 180 degree shift.

Note 2 : Requirements on Environmental Protection: Q/S0002

Note 3 : LCM weight tolerance : ±5%

2. Input/Output Terminals

2.1 TFT LCD Panel

Mating Connector: 093G30-B0001A-G4(Starconn) or compatible

Pin	Name	I/O	Description
1	NC	-	No connection
2	NC	-	No connection
3	NC	-	No connection
4	NC	-	No connection
5	NC	-	No connection
6	NC	-	No connection
7	GND	P	Power ground
8	GND	P	Power ground
9	VDD	P	Power Supply +3.3V
10	VDD	P	Power Supply +3.3V
11	GND	P	Power ground
12	GND	P	Power ground
13	Rxin0-	I	-LVDS differential data input(R0~R5,G0)
14	Rxin0+	I	+LVDS differential data input(R0~R5,G0)
15	GND	P	Power ground
16	Rxin1-	I	-LVDS differential data input(G1~G5,B0~B1)
17	Rxin1+	I	+LVDS differential data input(G1~G5,B0~B1)
18	GND	P	Power ground
19	Rxin2-	I	-LVDS differential data input(B2~B5,-,-,DE)
20	Rxin2+	I	+LVDS differential data input(B2~B5,-,-,DE)
21	GND	P	Power ground
22	RxCLK-	I	-LVDS differential data input
23	RxCLK+	I	+LVDS differential data input
24	GND	P	Power ground
25	Rxin3-	I	-LVDS differential data input(R6~R7,G6~G7,B6~B7)
26	Rxin3+	I	+LVDS differential data input(R6~R7,G6~G7,B6~B7)
27	GND	P	Power ground
28	NC	-	No Connection
29	GND	P	Power ground
30	GND	P	Power ground

Note: I/O definition:

I----Input P----Power/Ground

3 Absolute Maximum Ratings

3.1 Driving TFT LCM Panel

GND=0V

Item	Symbol	MIN	MAX	Unit	Remark
Voltage Input	Vin	-0.5	5.0	V	Note1
Operation Temperature	TOP	-20	70	°C	
Storage Temperature	TST	-30	80	°C	
LED backlight power supply	VF	-0.3	22	V	
LED backlight driving current	IF	-	600	mA	
Relative Humidity (Note2)	RH	--	≤ 95	%	Ta ≤ 40°C
		--	≤ 85	%	40°C < Ta ≤ 50°C
		--	≤ 55	%	50°C < Ta ≤ 60°C
		--	≤ 36	%	60°C < Ta ≤ 70°C
		--	≤ 24	%	70°C < Ta ≤ 80°C
Absolute Humidity	AH	--	≤ 70	g/m ³	Ta > 70°C

Table 3.1 absolute maximum rating

Note1: Input voltage include Rxin0-/+, Rxin1-/+, Rxin2-/+, Rxin3-/+, RxCLK-/+, SEL6/8,VDD.

Note2: Ta means the ambient temperature. It is necessary to limit the relative humidity to the specified temperature range. Condensation on the module is not allowed.

4. ELECTRICAL CHARACTERISTICS

4.1 Driving TFT LCD Panel

VCC=3.3V, GND=0V, Ta=25°C

Item	Symbol	Min	Typ	Max	Units	Remark
Power supply Voltage	VDD	3.0	3.3	3.6	V	
Power supply ripple	V _{P-P}	-	-	100	mV	
Power supply current	I _{DD}	-	TBD	-	mA	
Power comsumption	P	-	TBD	-	mW	Note 1
Differential input voltage	Vid	200	-	600	mV	
Differential input common voltage	V _{cm}	-	1.2	-	V	
Differential input threshold voltage	Low level	V _{TL}	-100	-	-	mV
	Hight level	V _{TH}	-	-	100	mV
Inrush Current	I _{rush}	--	--	1.5	A	

Table 4.1 LCD module electrical characteristics

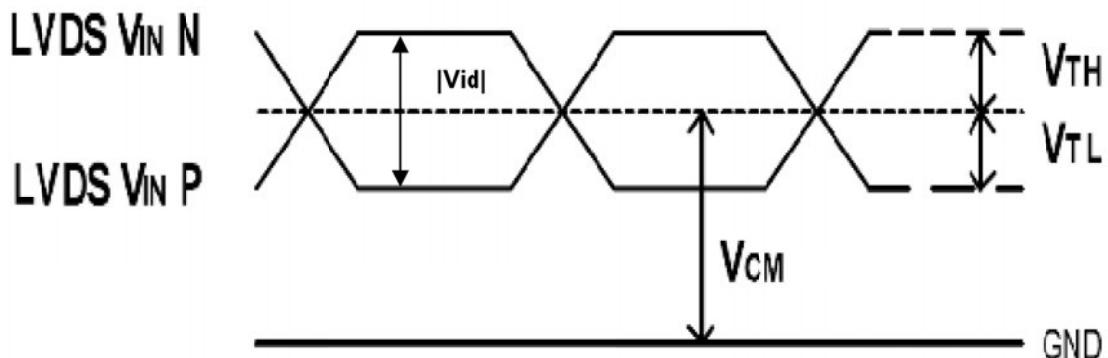



Fig 4.1 LVDS characteristics

Note1: To test the current dissipation, using the “white pattern” shown.

4.2 Driving Backlight

Input signals shall be low or Hi-Z state when VDD is off.

Item	Symbol	Min.	Typ.	Max	Unit	Remark
LED Backlight forward voltage	VF	-	18	20	V	
LED Backlight forward current	IF	-	-	600	mA	
Backlight power consumption	PLED	-	108	-	W	
Operating Life Time	-	-	T.B.D	-	hrs	Note 1

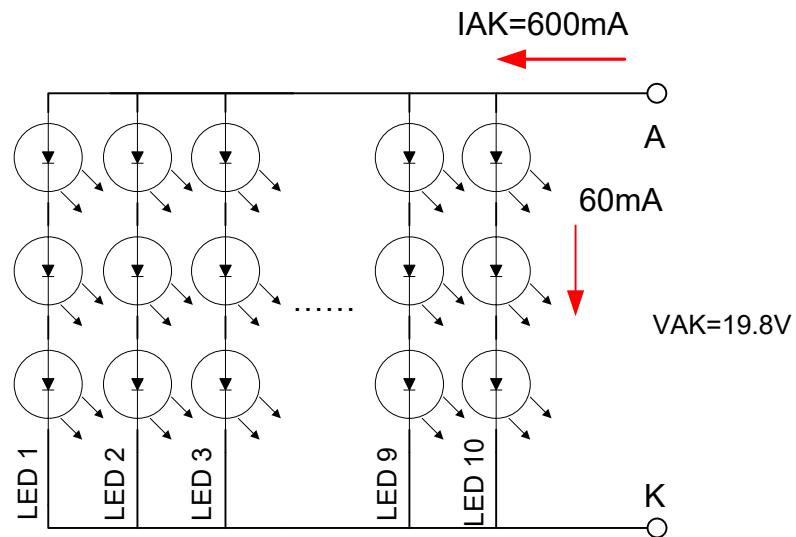

Note 1: Optical performance should be evaluated at $T_a=25^{\circ}C$ only.

Note 2: If LED is driven by high current, high ambient temperature & humidity condition.

The life time of LED will be reduced.

Note 3: Operating life means brightness goes down to 50% of initial brightness. Typical operating life time is estimated data.

5.1 LVDS signal timing characteristics

VCC=3.3V, GND=0V, Ta=25°C

Parameter	Symbol	Min	Typ	Max	Unit
CLK frequency	$1/t_c$	67	71	75	
MHz					
Horizontal display area	thd	-	1280	-	tc
Horizontal period	th	1290	1440	-	tc
Vertical display area	tvd	-	800	-	th
Vertical period	tv	810	823	-	th
Frame Rate	F	-	60	-	Hz

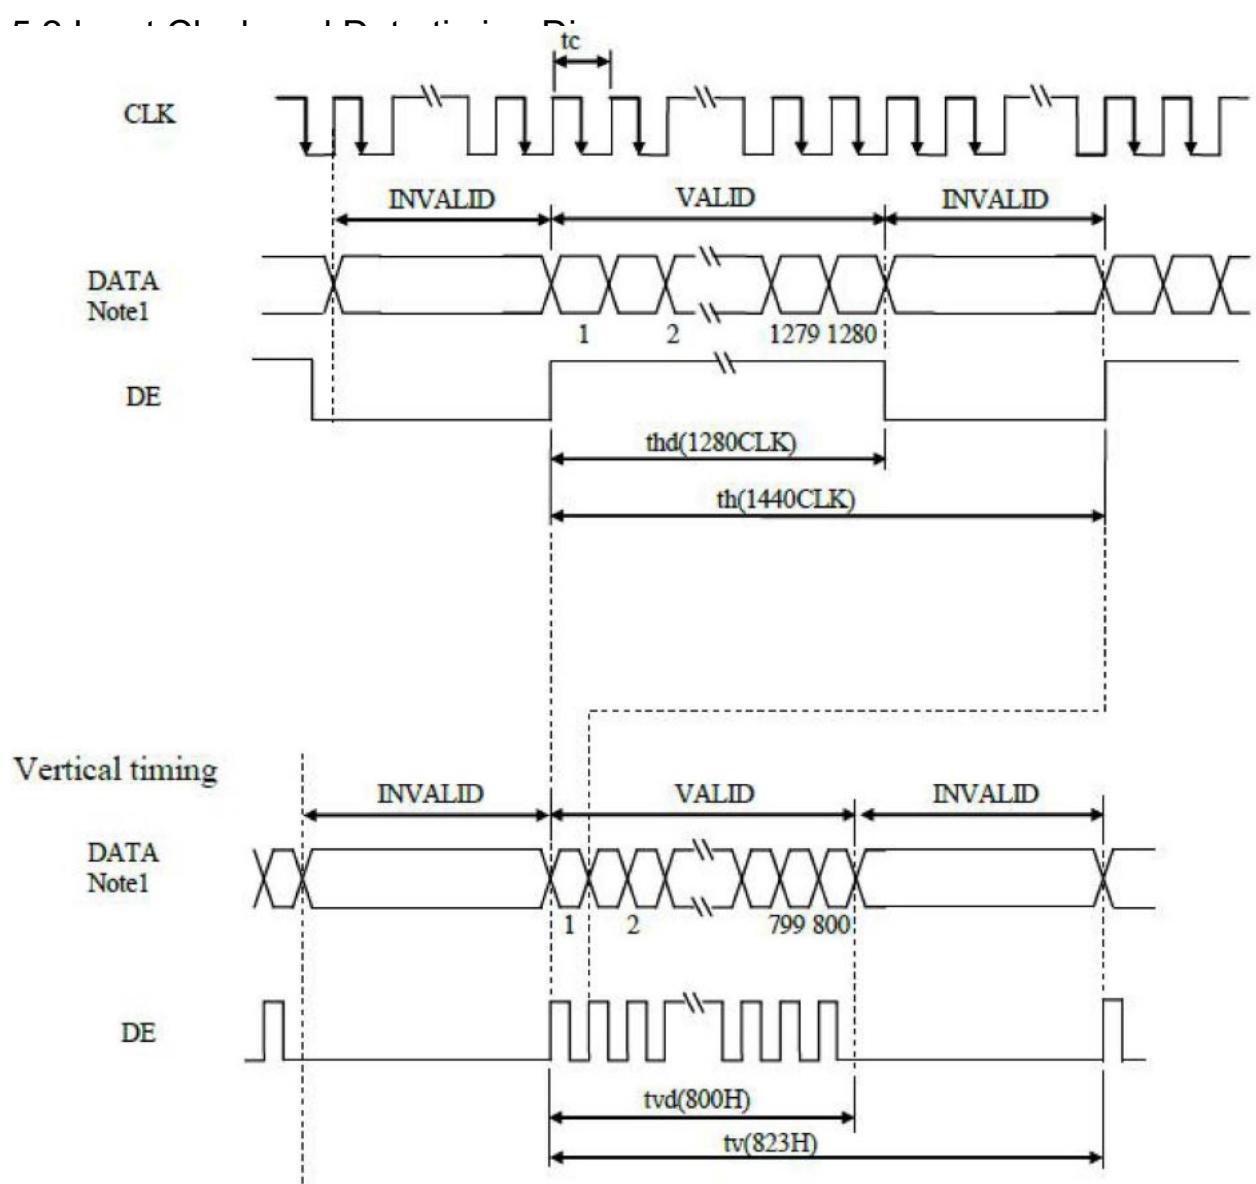


Figure 5.2 Input signal data timing

5.3 LVDS data input format

8-bit mode data input

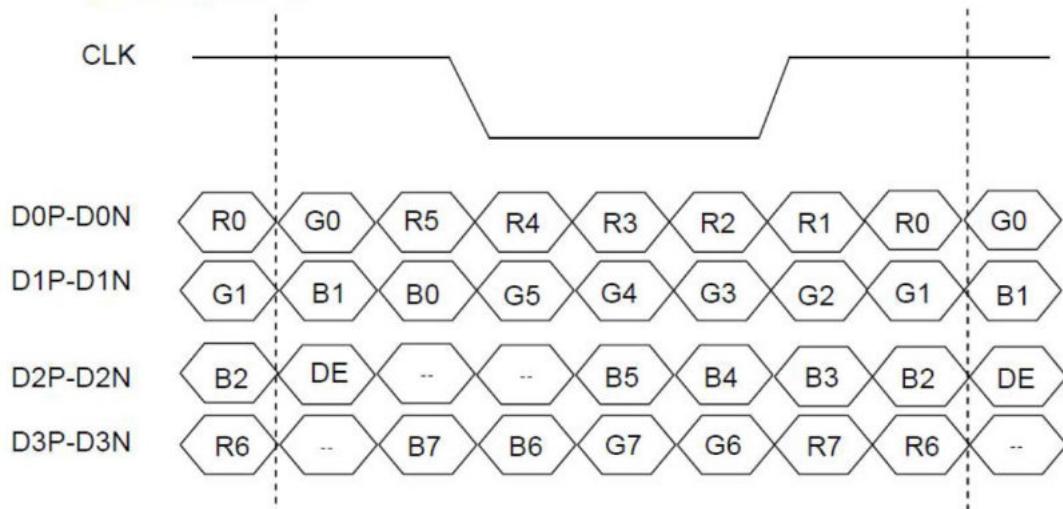


Figure 5.3 LVDS data input format

5.4 Power On/Off Sequence

Item	Symbol	Min	Typ	Max
Unit				
VDD on to VDD stable	Tp1 0.5	-	10	ms VDD
		stable to signal on Tp2	0 - 50 ms	
Signal on to VLED_EN on Tp3	200 - - ms	PWM on to VLED_EN on Tp4	0 - 200 ms	
VLED to PWM on Tp5	10 - - ms	VLED on to VLED stable	Tp6 0.5 - 10 ms	VDD off
time Tp7	0 - 10 ms	VDD off to next	VDD on Tp8 500 - - ms	Signal off before VDD
off Tp9	0 - 50 ms	VLED_EN off before signal off	Tp10 200 - - ms	VLED_EN off
	before PWM off	Tp11 0 - 200 ms	PWM off before	VLED off
			Tp12 10 - - ms	

Table 5.4 Power on/off sequence

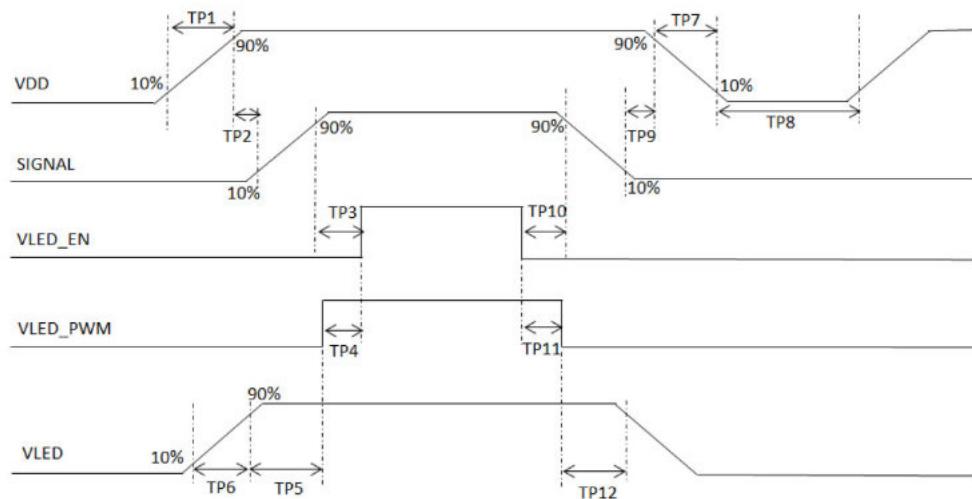


Figure 5.4 Interface power on/off sequence

6 Optical specification

6.1 Optical characteristic of the LCD


Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
View Angles	θ_T	$CR \geq 10$	75	85	--	Degree	Note 2
	θ_B		75	85	--		
	θ_L		75	85	--		
	θ_R		75	85	--		
Contrast Ratio	CR	$\theta=0^\circ$	800	1000	--		Note 1 Note 3
Response Time	T_{ON}	$25^\circ C$	--	12	--	ms	Note 1 Note 4
	T_{OFF}		--	13	--		
Chromaticity	White X	Backlight is ON	0.266	0.316	0.366	--	Note 1 Note 5
	White Y		0.300	0.350	0.400		
	Red X		0.517	0.567	0.617		
	Red Y		0.299	0.349	0.399		
	Green X		0.308	0.358	0.408		
	Green Y		0.507	0.557	0.607		
	Blue X		0.116	0.166	0.216		
	Blue Y		0.103	0.153	0.203		
Uniformity	U		70	75	--	%	Note 1 Note 6
NTSC			35	40	--	%	Note 5
Luminance	L	VF=19.8V IF=600mA	960	1200	--	cd/m ²	Note 1 Note 7

Test Conditions:

1. The ambient temperature is $25 \pm 2^\circ C$. humidity is $65 \pm 7\%$
2. The test systems refer to Note1 and Note 2.

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

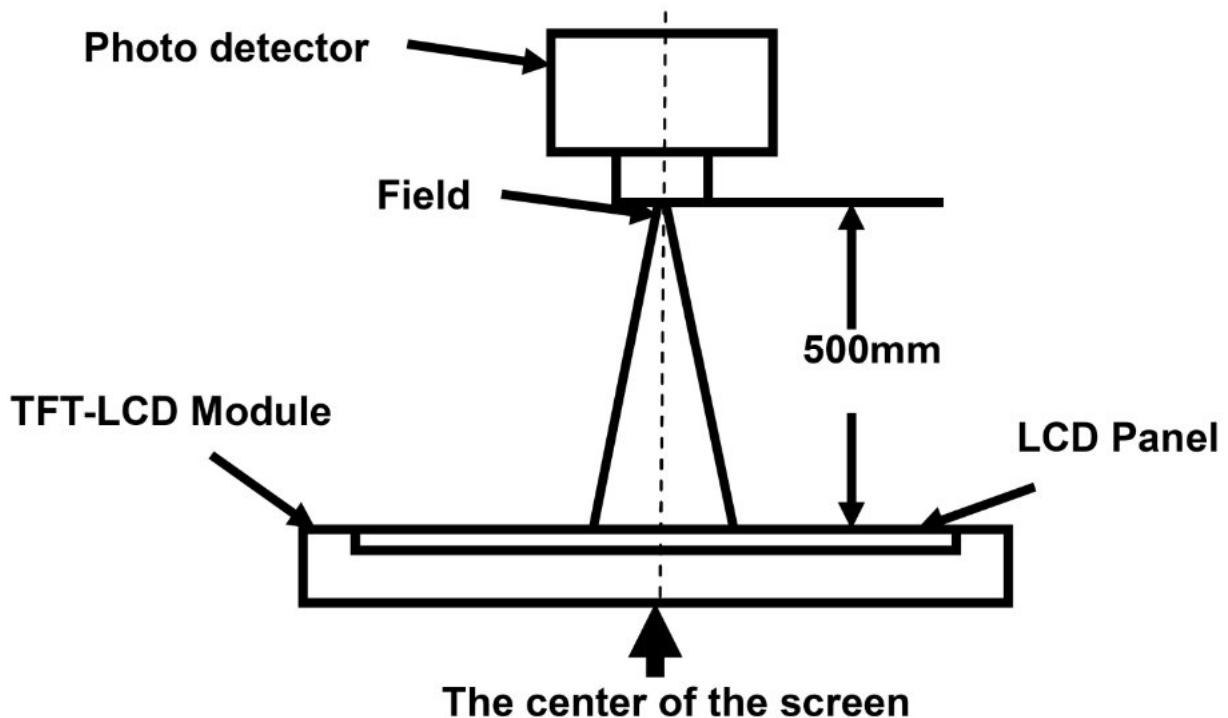

Note 2: Definition of viewing angle range and measurement system.

viewing angle is measured at the center point of the LCD by CONOSCOPE (ergo-80).

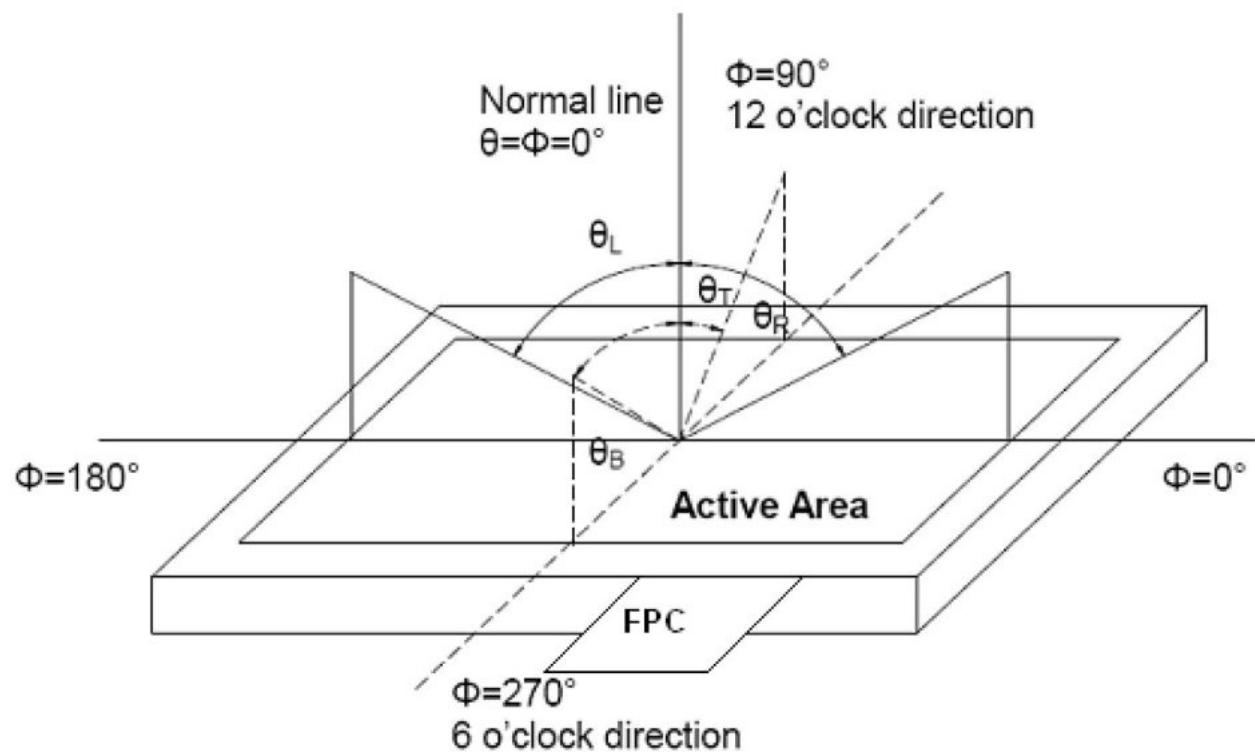


Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio(CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

“White state”: The state is that the LCD should driven by V_{white} .


“Black state”: The state is that the LCD should driven by V_{black} .

V_{white} : To be determined

V_{black} : To be determined.

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

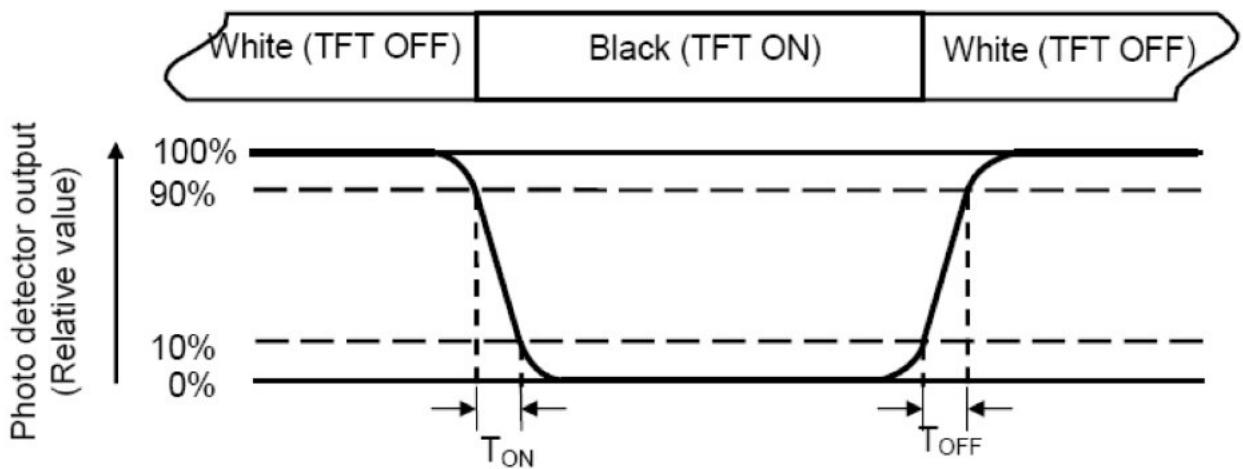

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity(U)} = \frac{L_{\text{C}} \times L_{\text{D}}}{L \text{----- Active area length} W \text{----- Active area width}}$$

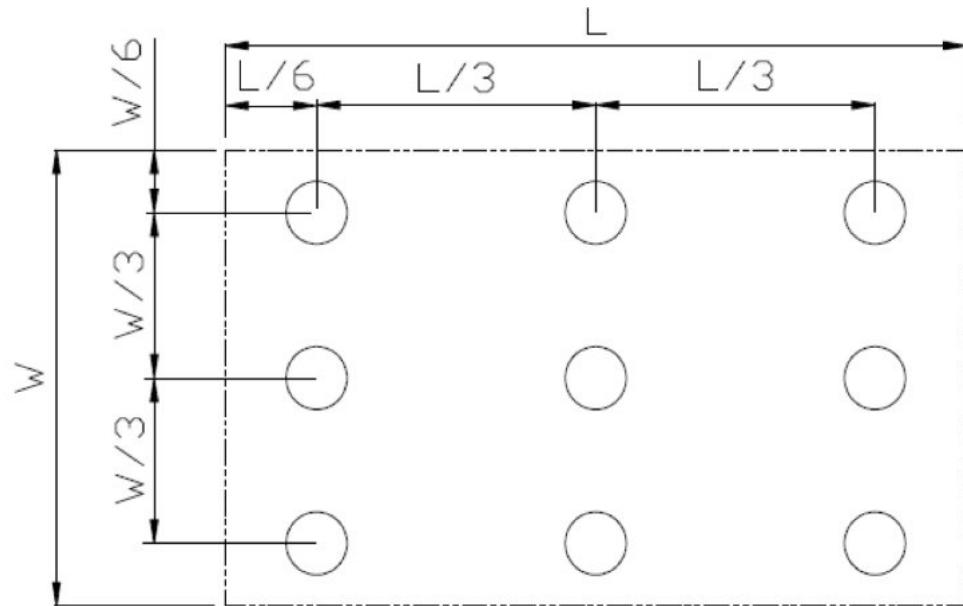


Fig. 2 Definition of uniformity

Lmax: The measured maximum luminance of all measurement position.

Lmin: The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance :

Measure the luminance of white state at center point.

7 Reliability Test Items

Test Item	Test Conditions	Note
High Temperature Operation	T _s = 70 C , t=240 hrs	
Low Temperature Operation	T _a = -20 C , t=240 hrs	
High Temperature Storage	T _a = 80 C , t=240 hrs	1,2
Low Temperature Storage	T _a = -30 C , t=240 hrs	1,2
Storage at High Temperature and Humidity	T _a = 60 C, 90% RH , 240 hrs	1,2
Thermal Shock Test	-30 C (30min) ~ 80 C (30min) Change time:5min, 100 cycles	1,2
Vibration Test (Packing)	Frequency range:10 ~ 55Hz, Stroke:1.5mm Sweep:10Hz ~ 55Hz ~ 10Hz 2hours for each direction of X.Y.Z (6 hours total)	2

Note 1 : T_s is the temperature of panel's surface.

Note 2 : T_a is the ambient temperature of sample.

8 USE PRECAUTIONS

8.1 Handling Precautions

- 8.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- 8.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- 8.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 8.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 8.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcoholSolvents other than those mentioned above may damage the polarizer.
Especially, do not use the following:
 - Water — Ketone
 - Aromatic solvents
- 8.1.6. Do not attempt to disassemble the LCD Module.
- 8.1.7. If the logic circuit power is off, do not apply the input signals.
- 8.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - 8.1.8.1. Be sure to ground the body when handling the LCD Modules.
 - 8.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.
 - 8.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
 - 8.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

8.2 Storage Precautions

- 8.2.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
- 8.2.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:
Temperature : 0°C ~ 40°C Relatively humidity: ≤80%
- 8.2.3. The LCD modules should be stored in the room without acid, alkali and harmful gas.

8.3 Transportation Precautions


The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

8.4 Other

AMIPRE will provide one year warranty for all products and three months warranty for all repairing products.


Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.

9. OUTLINE DIMENSION

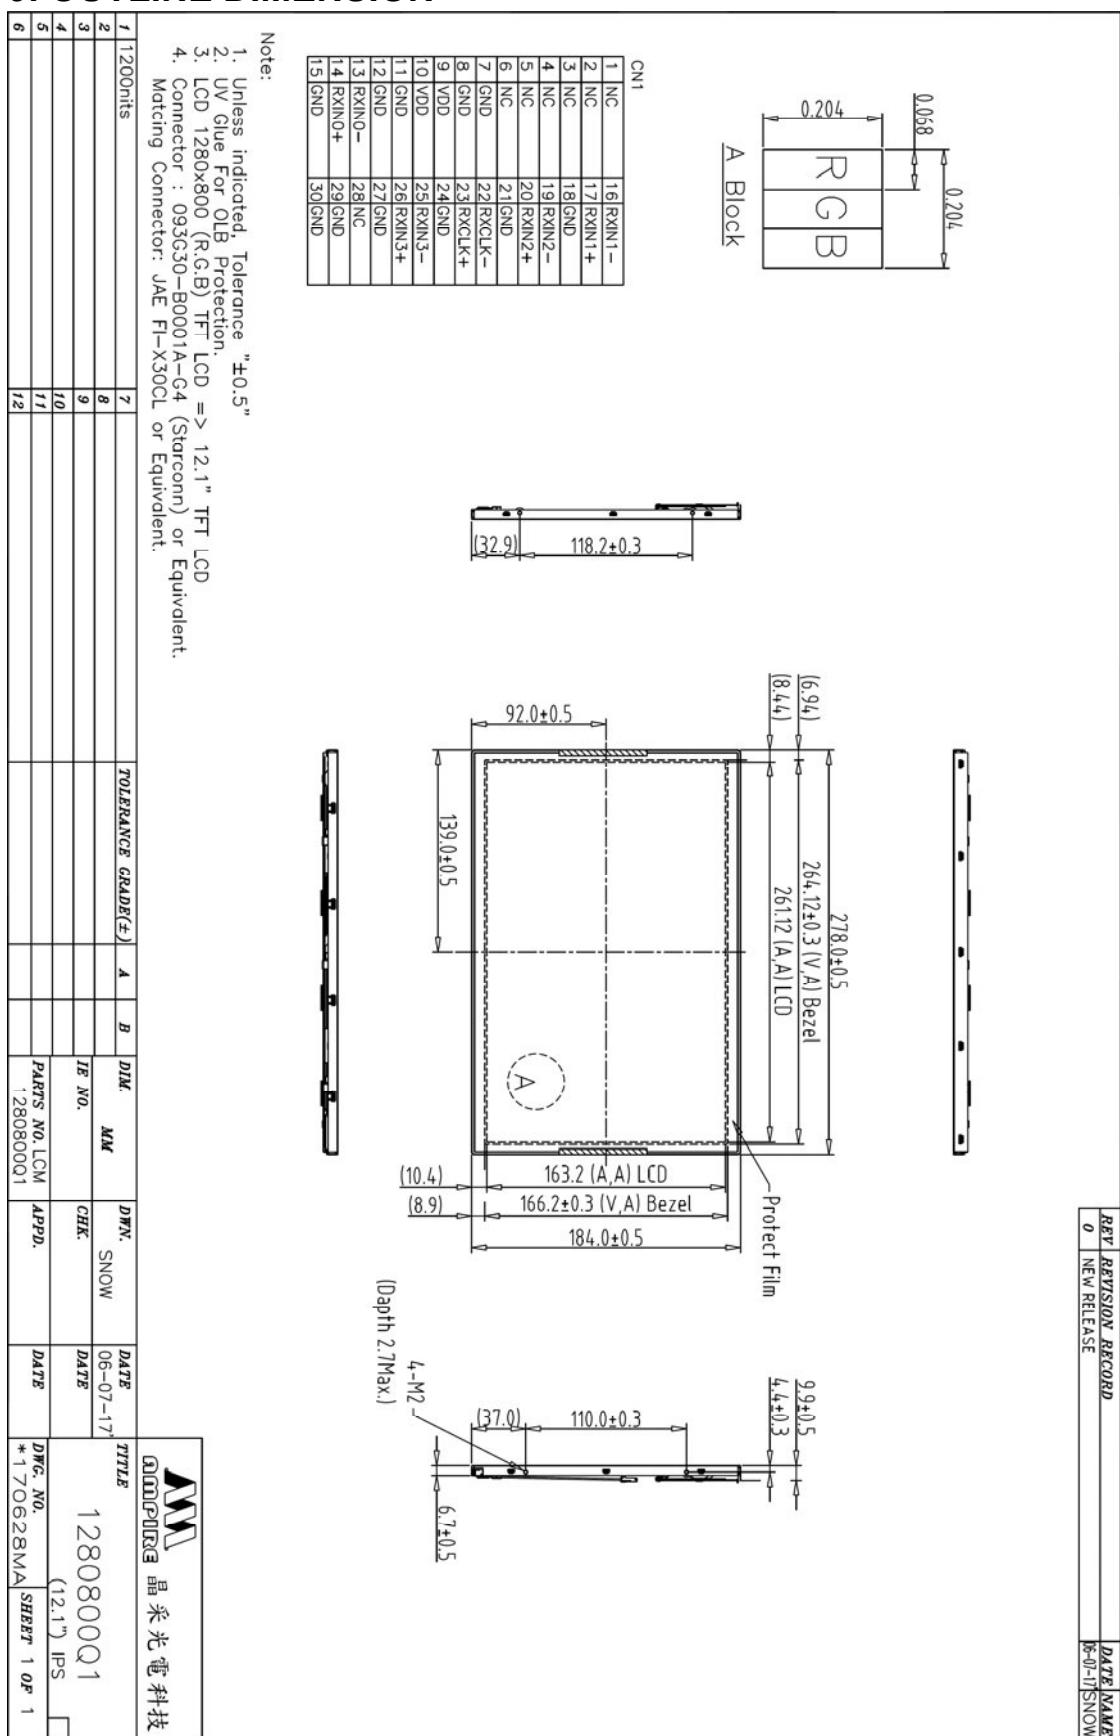

REV	REVISION RECORD	DATE	NAME
0	NEW RELEASE	06-01-11	SNOW

REV	REVISION RECORD	DATE	NAME
0	NEW RELEASE	06-07-17	SNOW

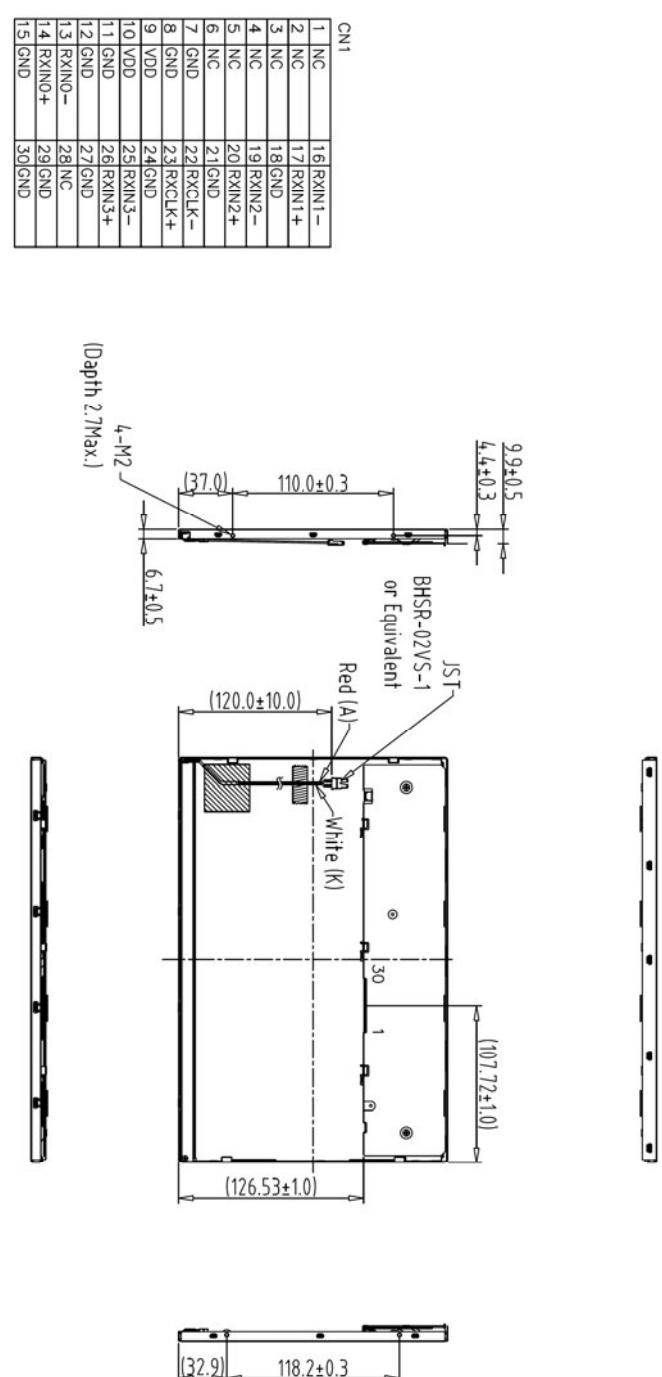

Note:

1. Unless indicated, Tolerance "±0.5"
 2. UV Glue For OLB Protection.
 3. LCD 1280x800 (R.G.B) TFT LCD => 12.1" TFT LCD
 4. Connector : 093G30-B0001A-G4 (Starconn) or Equivalent.
- Matching Connector: JAE FI-X30CL or Equivalent.

Back view

AMPIRE 明采光電科技

ITEM	7	TOLERANCE GRADE(±)	A	B	DIM	D/WN.	SNOW	DATE	TITLE
					MM			06-07-17	
2	8								
3	9								
4	10								
5	11								
6	12								

REF. NO. : 1280800Q1
 PARTS NO. : LCM-1
 APPD. : 1280800Q1
 DATE : *170629MA
 SHEET 1 OF 1